



BZX84C27 Electronic Diode Components BOM Service 27V Diode Zener

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: SOCAY
- Certification: REACH, RoHS, ISO
- Model Number: BZX84C27
- Minimum Order Quantity: 3000PCS
- Price: Negotiable
- Delivery Time: 5-8 work days



Product Specification

- Name: Zener Diode
- Package: SOT-23
- P(AV): 300mW
- VZ (Nom.): 27V
- Zener Diode IFSM: 2.0A
- ZZK: 250Ω
- IZK: 0.5mA
- IR: 0.1μA
- Highlight: **BZX84C27 Diode Components,
Electronic Diode Components, 27V Diode Zener**



for more products please visit us on socaydiode.com

Product Description

27V Reliable Quality Zener Diode BZX84C27 Electronic Components BOM Service

Zener Diode DATASHEET: [BZX84C2V4~BZX84C75\(SOT-23\)_v2112.1.pdf](#)

Reliable Quality Zener Diode Features:

BZX84C27 Planar Die construction
300mW Power Dissipation
BZX84C27 Zener Voltages from 2.4V to 75V
RoHS compliant / Green EMC

Zener Diode BZX84C27 Absolute Max. Ratings:

BZX84C27 Parameter	Symbol	Value	Units
Maximum Forward Voltage (Note 2) @ IF=10mA	VF	0.9	V
BZX84C27 Power Dissipation (Note 1)	P(AV)	300	mW
BZX84C27 Operating and Storage Temperature	TJ,TSTG	-55 to +150	
BZX84C27 Peak Forward Surge Current	IFSM	2.0	A
BZX84C27 Thermal Resistance Junction to Ambient	RJ	357	/W
Note1: Valid provided that device terminals are kept at ambient temperature.			
Note 2: Tested with pulses, period=5ms,pulse width =300μs.			

Zener Diode BZX84C27 Electrical Features:

Zener Diode Part Number	Zener Diode Zener Voltage Range (Note 2)			Zener Diode Max. Zener Impedance (Note 3)				Max. Reverse Leakage Current	
	VZ @ IZT			ZZT @ IZT		ZZK @ IZK		IR @ VR	
	Nom.(V)	Min.(V)	Max.(V)	(Ω)	(mA)	(Ω)	(mA)	(μA)	(V)
BZX84C2V4	2.4	2.2	2.6	100	5	600	1	50	1
BZX84C2V7	2.7	2.5	2.9	100	5	600	1	20	1
BZX84C3V0	3.0	2.8	3.2	95	5	600	1	10	1
BZX84C3V3	3.3	3.1	3.5	95	5	600	1	5	1
BZX84C3V6	3.6	3.4	3.8	90	5	600	1	5	1
BZX84C3V9	3.9	3.7	4.1	90	5	600	1	3	1
BZX84C4V3	4.3	4.0	4.6	90	5	600	1	3	1
BZX84C4V7	4.7	4.4	5.0	80	5	500	1	3	2
BZX84C5V1	5.1	4.8	5.4	60	5	480	1	2	2
BZX84C5V6	5.6	5.2	6.0	40	5	400	1	1	2
BZX84C6V2	6.2	5.8	6.6	10	5	150	1	3	4
BZX84C6V8	6.8	6.4	7.2	15	5	80	1	2	4
BZX84C7V5	7.5	7.0	7.9	15	5	80	1	1	5
BZX84C8V2	8.2	7.7	8.7	15	5	80	1	0.7	5
BZX84C9V1	9.1	8.5	9.6	15	5	100	1	0.5	6
BZX84C10	10	9.4	10.6	20	5	150	1	0.2	7
BZX84C11	11	10.4	11.6	20	5	150	1	0.1	8
BZX84C12	12	11.4	12.7	25	5	150	1	0.1	8
BZX84C13	13	12.4	14.1	30	5	170	1	0.1	8
BZX84C15	15	13.8	15.6	30	5	200	1	0.1	10.5
BZX84C16	16	15.3	17.1	40	5	200	1	0.1	11.2
BZX84C18	18	16.8	19.1	45	5	225	1	0.1	12.6
BZX84C20	20	18.8	21.2	55	5	225	1	0.1	14.0

Part Number	Zener Diode Zener Voltage Range (Note 2)			Zener Diode Max. Zener Impedance (Note 3)				Zener Diode Max. Reverse Leakage Current	
	VZ @ IZT			ZZT @ IZT		ZZK @ IZK		IR @ VR	
	Nom.(V)	Min.(V)	Max.(V)	(Ω)	(mA)	(Ω)	(mA)	(μA)	(V)
BZX84C22	22	20.8	23.3	55	5	250	1	0.1	15.4
BZX84C24	24	22.8	25.6	70	5	250	1	0.1	16.8
BZX84C27	27	25.1	28.9	80	2	300	0.5	0.1	18.9

BZX84C30	30	28.0	32.0	80	2	300	0.5	0.1	21.0
BZX84C33	33	31.0	35.0	80	2	325	0.5	0.1	23.1
BZX84C36	36	34.0	38.0	90	2	350	0.5	0.1	25.2
BZX84C39	39	37.0	41.0	130	2	350	0.5	0.1	27.3
BZX84C43	43	40.0	46.0	100	2	700	1	0.1	32.0
BZX84C47	47	44.0	50.0	170	2	375	1	0.05	32.9
BZX84C51	51	48.0	54.0	180	2	400	1	0.05	35.7
BZX84C62	62	58.0	66.0	215	2	450	0.5	0.05	43.4
BZX84C68	68	64.0	72.0	240	2	1600	0.25	0.05	47.6
BZX84C75	75	70.0	79.0	255	2	1700	0.25	0.05	52.5


Note 2: Tested with pulses, period=5ms,pulse width =300μs.
Note 3: f=1kHz.

SOT-23 SMD Zener DiodeBZX84C27 Circuit Diagram:

SOT-23



Pin Configuration - Top View



SOT-23 Surface Mount Zener Diode BZX84C27 Curves:
Fig1. Zener Characteristics (V_Z Up to 10V)

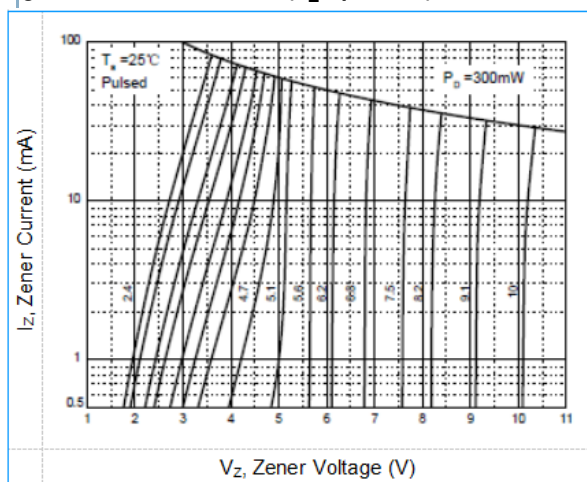


Fig2. Zener Characteristics (11V to 43V)

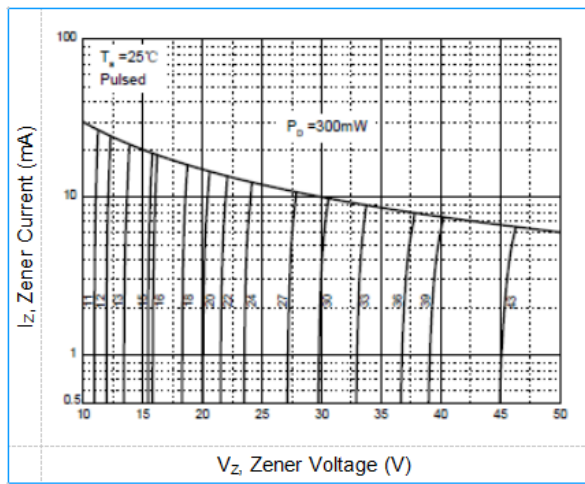


Fig3. Zener Diode Temperature Coefficients



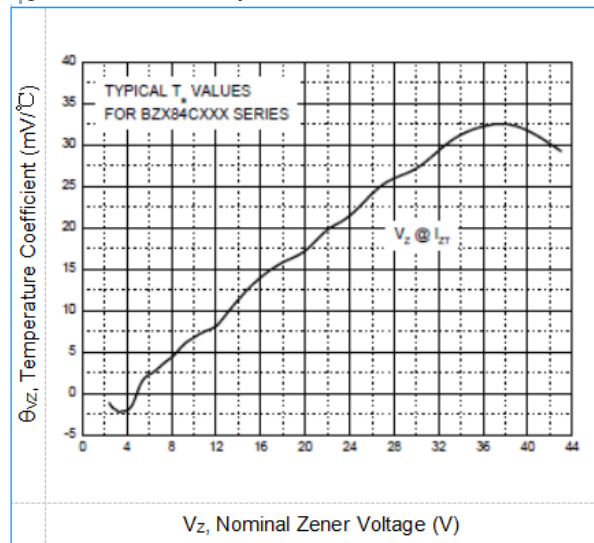


Fig4. Zener Diode Typical Leakage Current

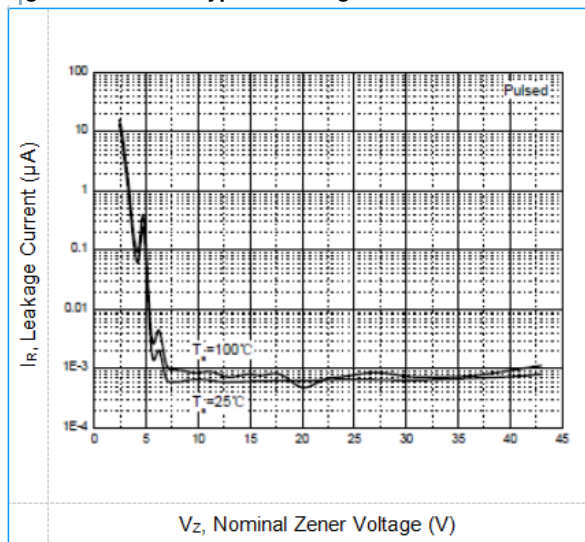


SOT-23 Zener Diode BZX84C27 Package Outline:

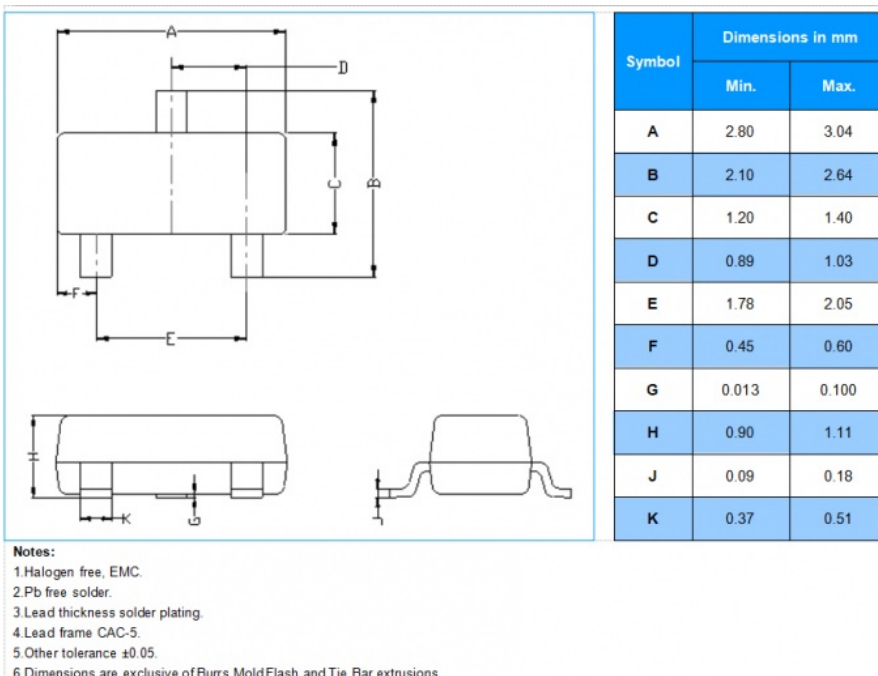

SOT-23 Package Zener Diode BZX84C27 Quantity:

Zener Diode Part Number	Component Package	Zener Diode Quantity
BZX84C2V4~BZX84C75	SOT-23	Tape & Reel 3000 PCS / 7" Reel

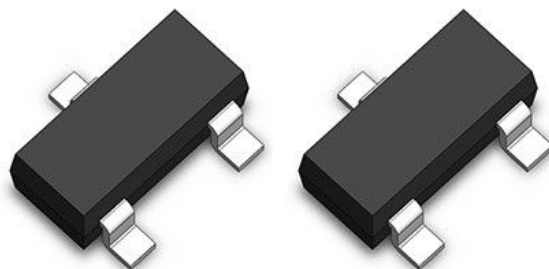

 **Shenzhen Socay Electronics Co., Ltd.**

 +8618126201429

 sylvia@socay.com

 socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City, Guangdong Province, China